



## **E-Z TRAY EZ-36HF**

### GENERAL SPECIFICATIONS

- Max. flow rate: 375 GPM
- Air flow: 1900 CFM
- Sump working vol.: 442 GAL
- Materials of construction: 304SS , polycarbonate door, neoprene gaskets and polyester felt.

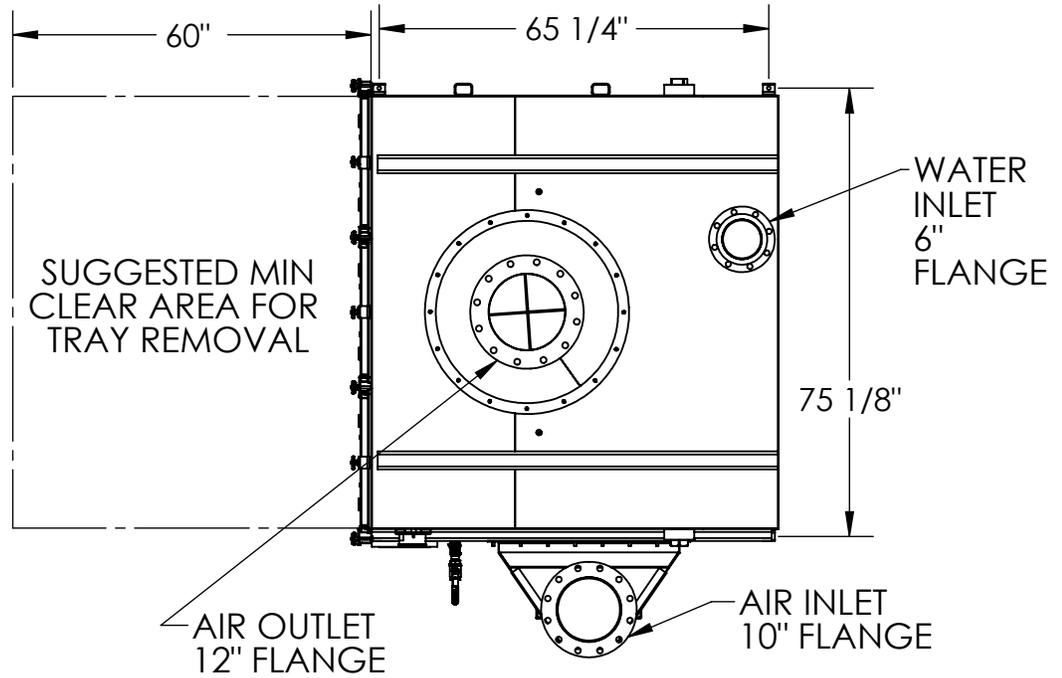

**PLAN VIEW**

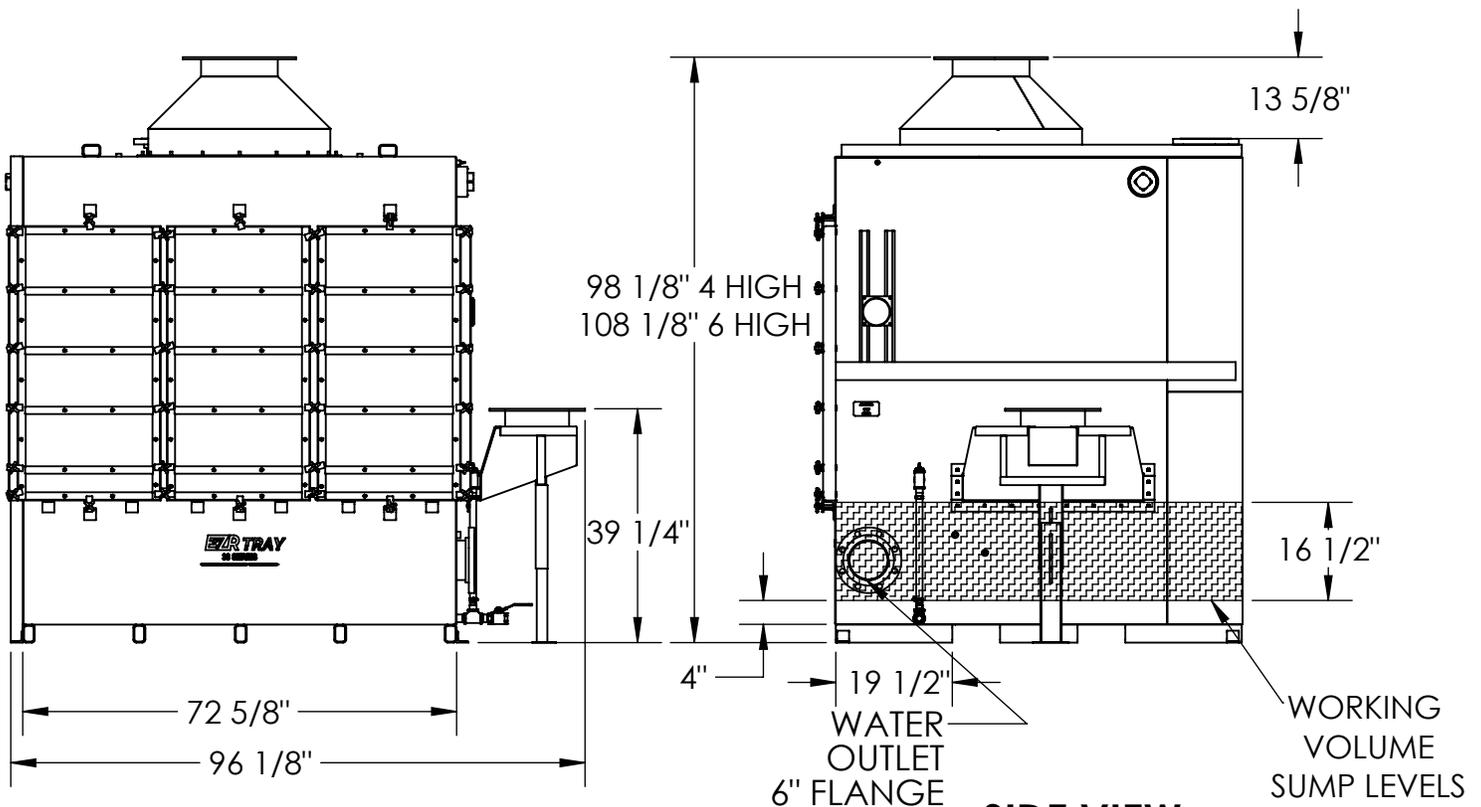

**FRONT VIEW**


**SIDE VIEW**

**EZ-36HF (AIR STRIPPER ONLY)**  
FOR MORE SPECIFICATIONS SCAN:

<http://www.qedenv.com>

NOT TO SCALE, NOT FOR CONSTRUCTION, FOR REFERENCE ONLY  
LICENSED UNDER PATENT # 10,272,356 B2 AND  
MORE U.S. AND NON U.S. PATENTS.



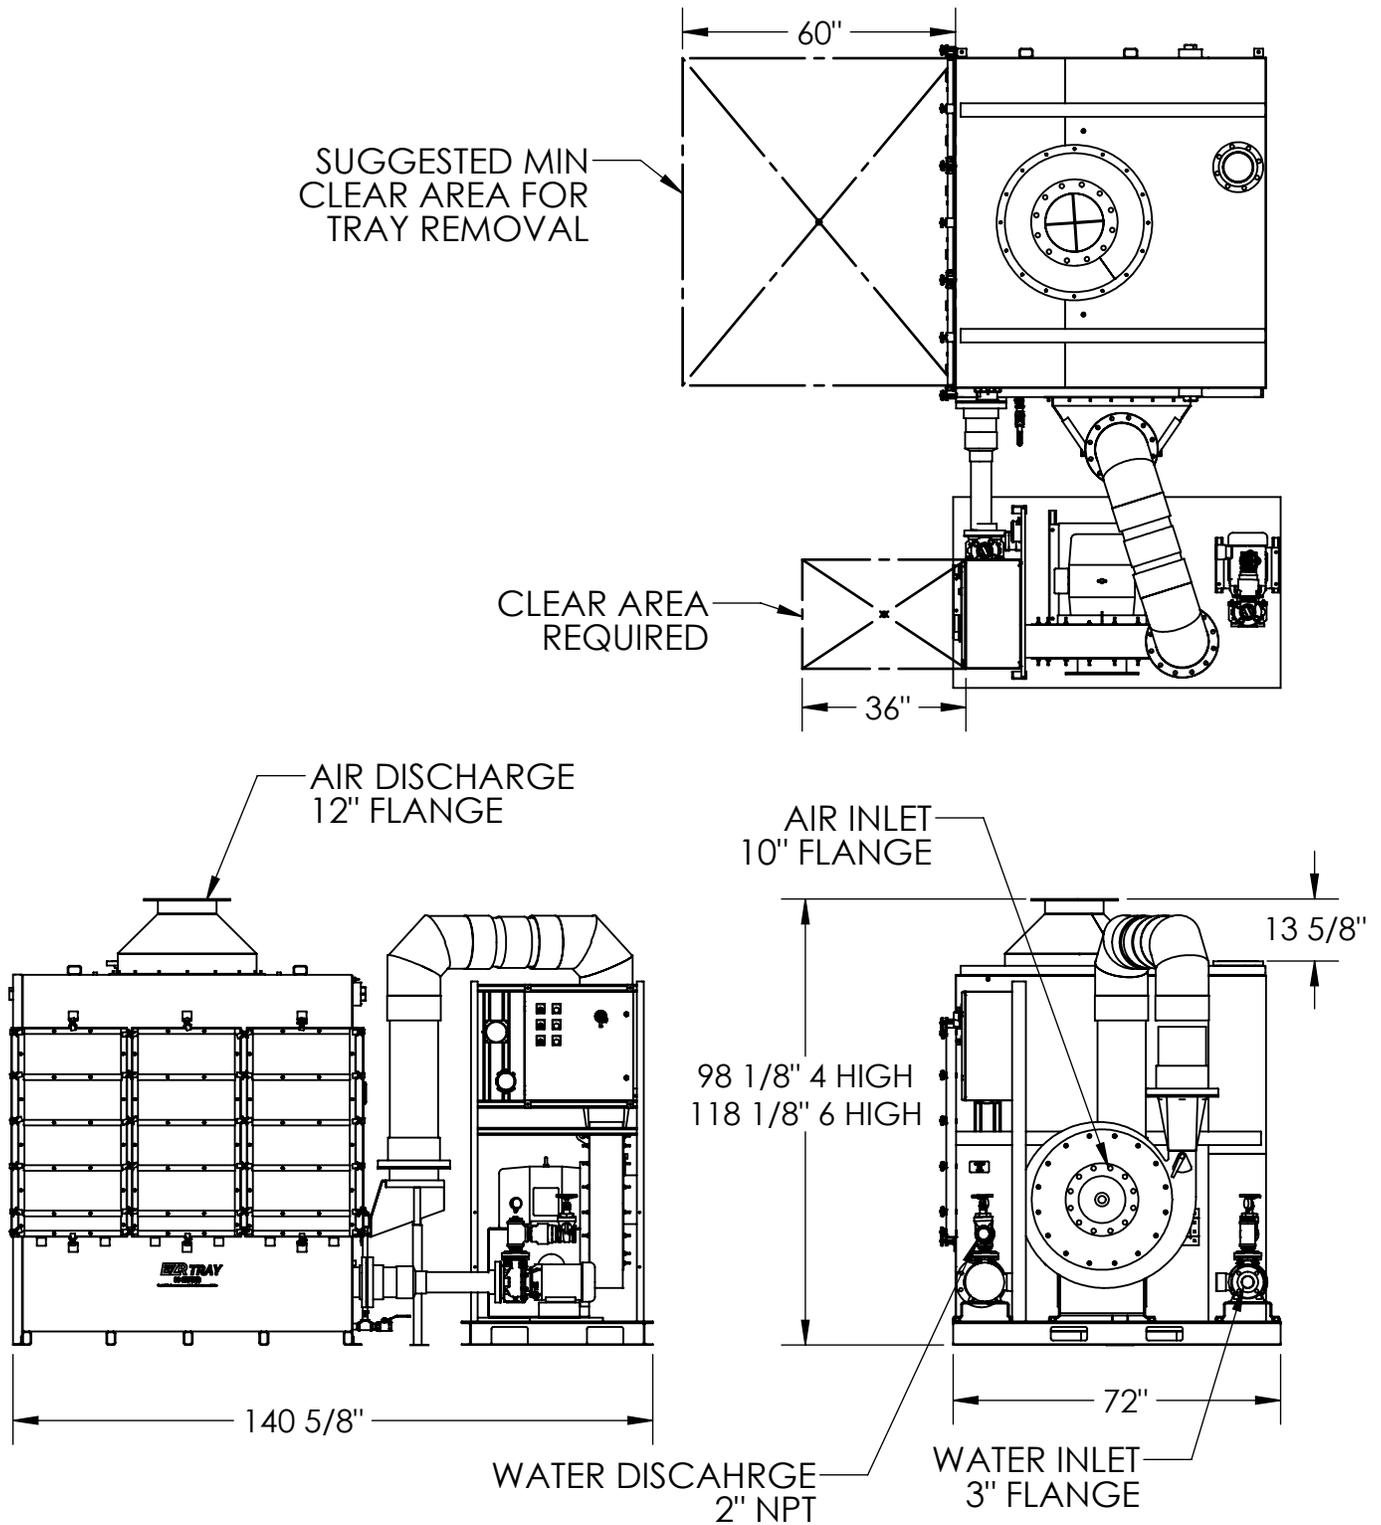

**EZ-36HF (AIR STRIPPER ONLY)**

FOR MORE SPECIFICATIONS SCAN:

NOT TO SCALE, NOT FOR CONSTRUCTION, FOR REFERENCE ONLY  
 LICENSED UNDER PATENT # 10,272,356 B2 AND  
 MORE U.S. AND NON U.S. PATENTS.  
 THE ACTUAL UNIT MAY LOOK DIFFERENT THAN SHOWN IF 6 HIGH UNIT.