
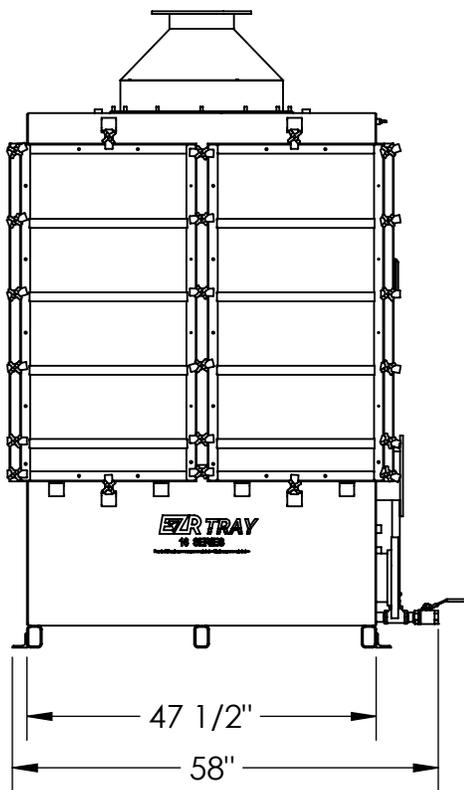



## **E-Z TRAY EZ-16HF**

### **GENERAL SPECIFICATIONS**

- Max. flow rate: 250 GPM
- Air flow: 850 CFM
- Sump working vol.: 165 GAL
- Materials of construction: 304SS , polycarbonate door, neoprene gaskets and polyester felt.

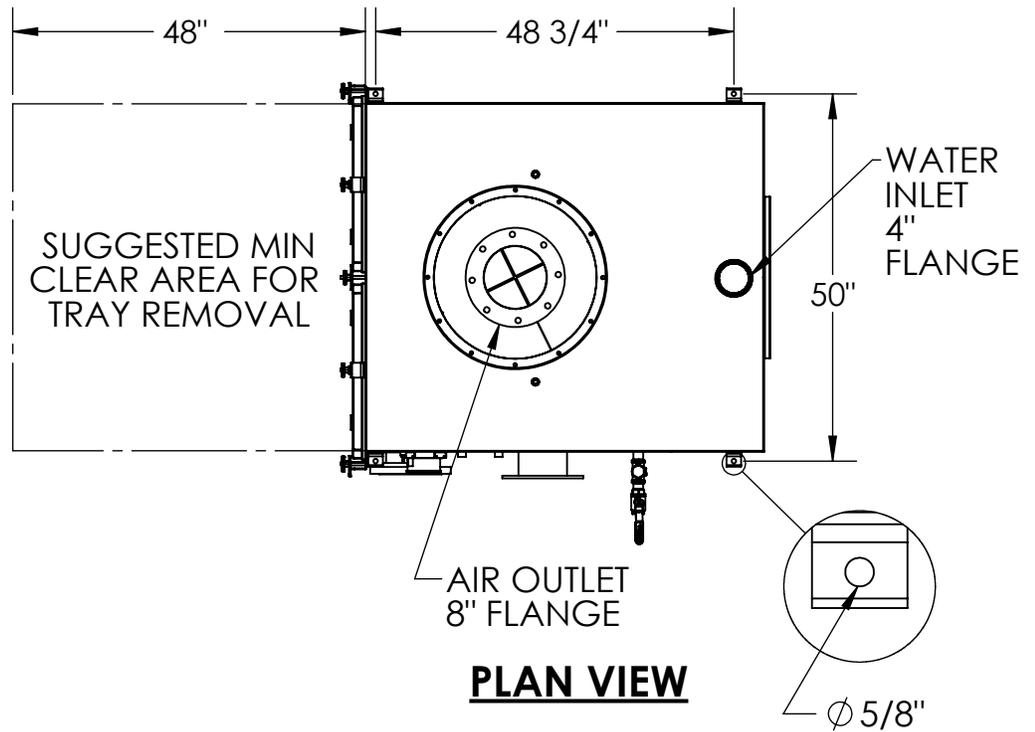



**FRONT VIEW**

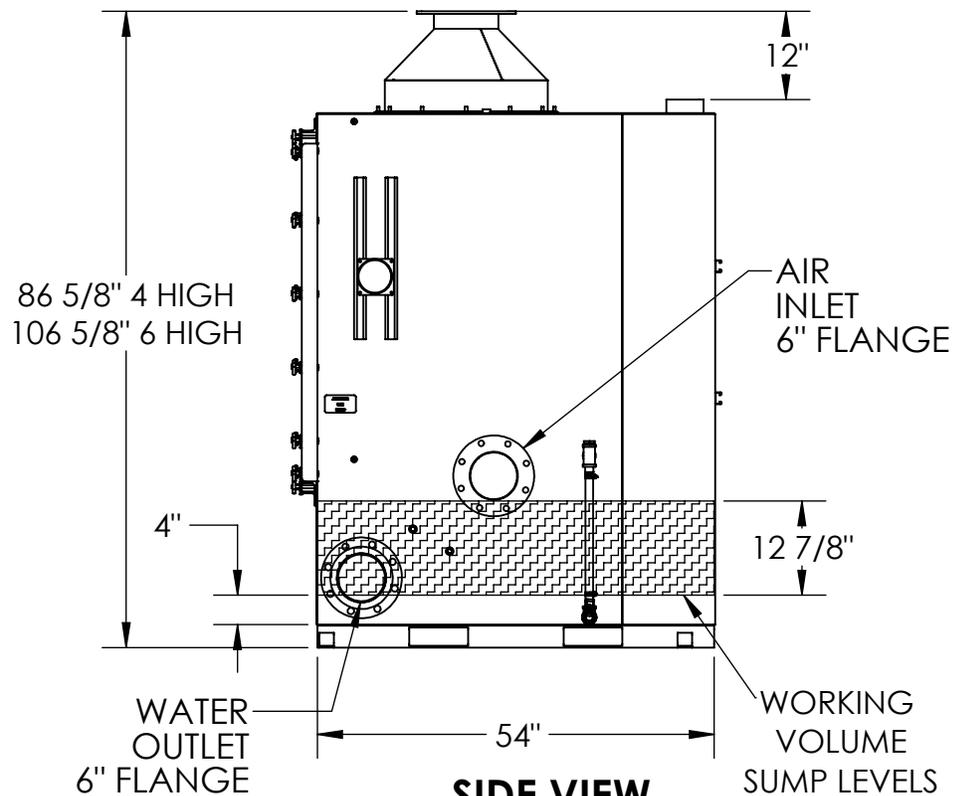

**EZ-16HF (AIR STRIPPER ONLY)**  
 FOR MORE SPECIFICATIONS SCAN:  
<http://www.qedenv.com>



*NOT TO SCALE, NOT FOR CONSTRUCTION, FOR REFERENCE ONLY  
 LICENSED UNDER PATENT # 10,272,356 B2 AND  
 MORE U.S. AND NON U.S. PATENTS.  
 THE ACTUAL UNIT MAY LOOK DIFFERENT THAN SHOWN IF 6 HIGH UNIT.*

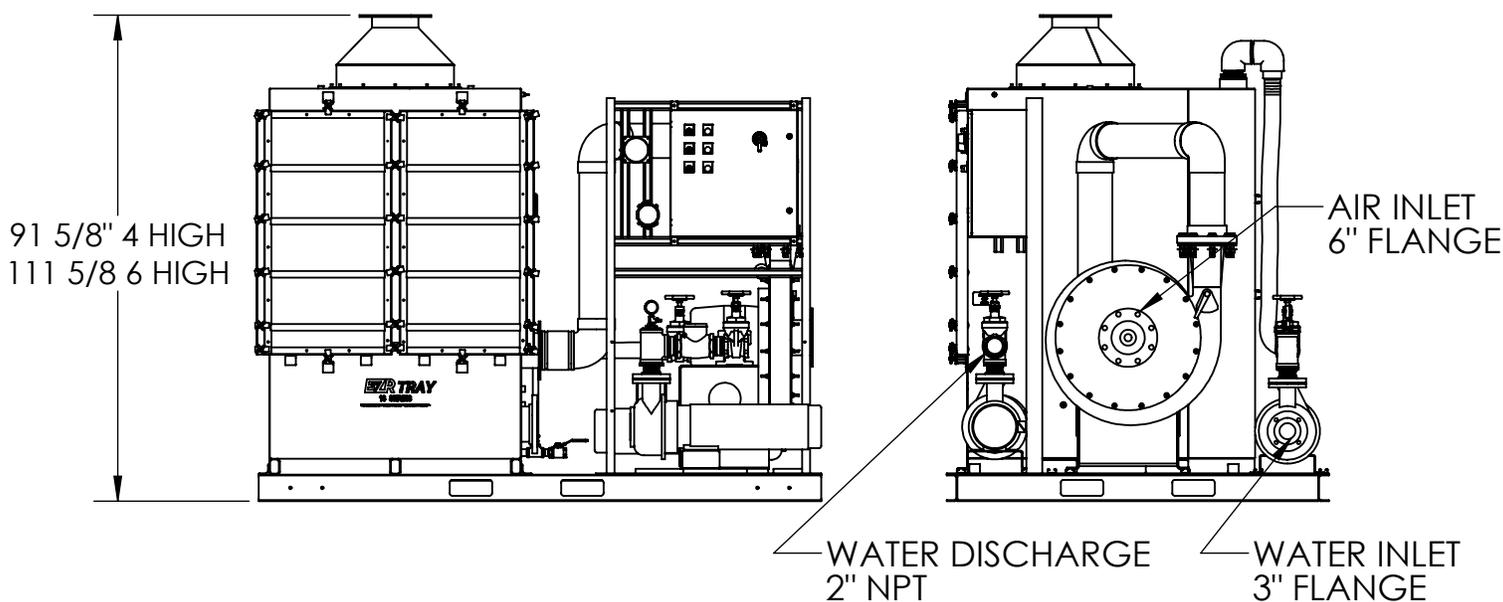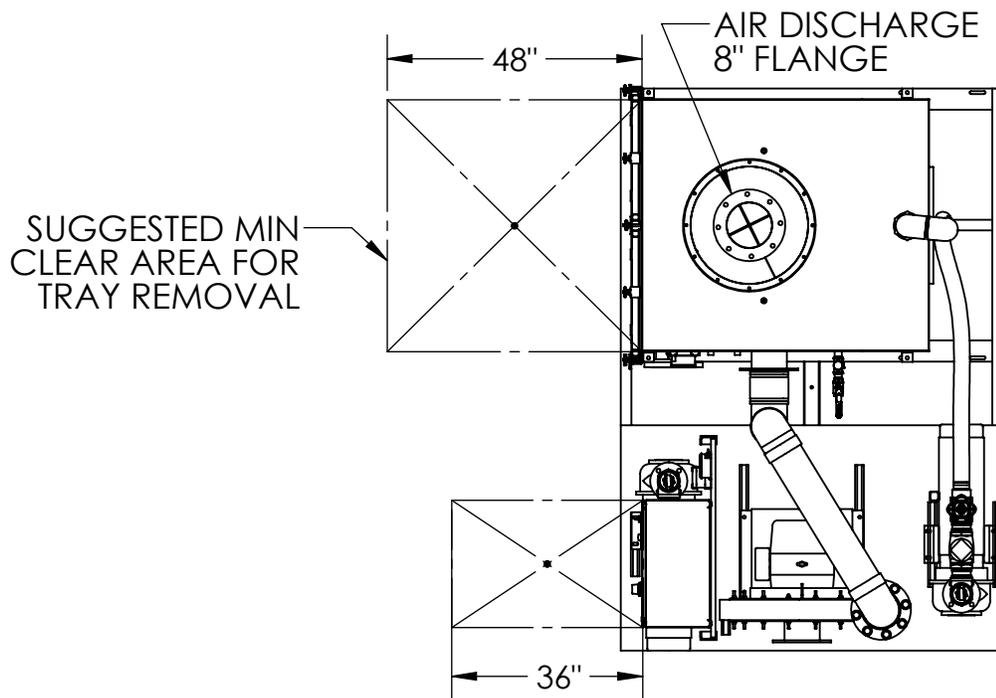

**EZ-16HF (AIR STRIPPER ONLY)**  
FOR MORE SPECIFICATIONS SCAN:

NOT TO SCALE, NOT FOR CONSTRUCTION, FOR REFERENCE ONLY  
 LICENSED UNDER PATENT # 10,272,356 B2 AND  
 MORE U.S. AND NON U.S. PATENTS.  
 THE ACTUAL UNIT MAY LOOK DIFFERENT THAN SHOWN IF 6 HIGH UNIT.